



GAS & ELECTRIC PRODUCTS BROCHURE

welcome  
to  
 **ekofires**  
a source of greener heat

*relax and enjoy our fires  
in an ambience  
designed to warm your  
heart & soul.*



# *ethos of ekofires*

**H**aving an extensive knowledge and vast experience in the development of gas and electric fires has always ensured that we are at the cutting edge of technology. Efficiency, heat performance, running costs, reliability and, of course, your safety is of the utmost importance to us.

We were the first company in our industry to achieve the internationally recognised ISO 14001 Environmental Management System. The impact our business has on our planet is very important to us and we are always improving our environmental performance in order to reduce this effect.

We are proud to be accredited with ISO 9001 Quality Management System. Our commitment to meeting the stringent demands demonstrates our quality is second to none. Every fire is individually tested and fully calibrated in order to meet quality control measures.

We are so confident in our fires that we include a three year guarantee on all of our products to ensure nothing but, trust. That's it – complete peace of mind.

# *table of contents*

05 – 18	INSET ELECTRIC FIRES
19 – 30	WALL MOUNTED ELECTRIC FIRES
31 – 62	ELECTRIC SUITES & STOVES
63 – 80	FLUELESS GAS FIRES
81 – 84	HIGH-EFFICIENCY GAS INSET FIRES
85 – 96	CONVENTIONAL FLUE INSET FIRES
97 – 116	TIMELESS COLLECTION
117 – 118	TAILORING SPECS – SURROUNDS
119 – 120	TAILORING SPECS – FRETS & FRAMES
121 – 122	TAILORING SPECS – GAS & ELECTRIC FIRES
123 – 124	TAILORING SPECS – ALL ELECTRIC FIRES
125 – 126	TERMS & CONDITIONS



## *inset electric fires*

If you are looking for a stylish electric fire to complement your living space then an inset electric fire could be the missing piece for you. It instantly transforms your house into a home and provides an efficient focal point in a number of rooms. From elegant, traditional, designs to the more modern look, eko fires has a wide variety of LED models for you to choose.

*Plug in and enjoy the ambiance.*

### *technical specifications for installation*

Electric fires require a fixed socket within 1.8 meters of the installed location. The socket must be easily accessible and not located directly above the appliance. It is recommended that any open flues be sealed off to prevent down draughts from causing nuisance cut offs. These appliances must not be installed into bathrooms or within the immediate vicinity of showers or swimming pools. Do not allow appliances to become covered as this may cause overheating.

### *what safety features are on the appliance?*

All of our electric products are fitted with a thermal trip switch that monitors the temperature inside the appliance and senses any change if it becomes covered or displaced for any reason.

### *can I operate only the flame-effect?*

All electric appliances benefit by having the flame-effect only option.



*eko 1060: page 07 - 08*

### *benefits of inset electric fires*

- ✿ No chimney or flue required.
- ✿ Easy to use — simply take home, plug-in, enjoy.
- ✿ Can be fitted fully-inset, semi-inset or freestanding (spacer frames included).
- ✿ Can be installed on virtually any internal or external wall.
- ✿ A wide range of traditional and modern fret and frames choices.
- ✿ Remote control.
- ✿ Timer control options.
- ✿ Full thermostatic control.



*model shown:*  
eko 1070 Reflections with Elegance Brass FRT210, Classic Inlay Brass FRM10 & coal-effect fuel bed



*eko 1060 with mono chrome FRT420*



*standard screen*



*reflections screen*

### *specifications*

Fire Type	LED Electric Fire
Control Type/Location	Manual - Button & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W480 x H595 x D114 mm
Installation	Inset
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.

## *eko 1060/70*

Combining a flickering flame effect and under bed glow the eko 1060 and 1070 range of low energy LED electric fires provides a real alternative to a gas fire that can be adapted to fit almost any fireplace requirement, thanks to its two-part spacer frame.

The eko 1060/70 features a 2.0 kW heat output, flame effect only setting – no heat, thermostatic control, timer control, full remote control or buttons on the front of the fire below the canopy. A helpful LED display is located in the top left hand corner of the window which displays, flame brightness, timer and thermostatic control.

### *eko 1060*

The entry level eko 1060 features an opaque screen which provides a warm flame picture with deep red tones.

### *eko 1070*

The eko 1070 Reflections model features an upgraded screen. A premium piece of reflective glass increases the perceived depth of the fire by reflecting the coal fuel bed into the mirrored glass. This gives a much more realistic and vibrant flame picture and creates the illusion that the flames are originating from between the front and rear reflected coals.

*See pgs 99-100 for more fret & frame options*



*model shown:*  
eko 1060 Contemporary with coal-effect fuel bed and standard opaque screen



*eko 1070 contemporary w/reflections screen*



*coal-effect*

*real pebbles*

### *specifications*

Fire Type	LED Electric Fire
Control Type/Location	Manual - Button & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W480 x H595 x D 114 mm
Installation	Inset
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.

## *eko 1060/70 contemporary*

Combining a flickering flame effect and under bed glow the eko 1060 and 1070 Contemporary range of low energy LED electric fires provides a real alternative to a gas fire that can be adapted to fit almost any fireplace requirement, thanks to it's two-part spacer frame.

The eko 1060/70 features a 2.0 kW heat output, flame-effect only setting - no heat, thermostatic control, timer control, full remote control or buttons on the front of the fire below the canopy. A helpful LED display is located in the top left hand corner of the window which displays, flame brightness, timer and thermostatic control.

### *eko 1060 contemporary*

The entry level eko 1060 features an opaque screen which provides a warm flame picture with deep red tones.

### *eko 1070 con. reflections*

The eko 1070 Reflections model features an upgraded screen. A premium piece of reflective glass increases the perceived depth of the fire by reflecting the coal fuel bed into the mirrored glass. This gives a much more realistic and vibrant flame picture and creates the illusion that the flames are originating from between the front and rear reflected coals.

*See pgs 99-100 for more fret & frame options*



*model shown:*  
eko 1080 Edwardian Timeless black cast iron with standard screen



*eko 1080 edwardian with reflections screen*



*standard screen*



*reflections screen*

### *specifications*

Fire Type	LED Electric Fire
Control Type/Location	Manual - Button & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W480 x H595 x D114 mm
Installation	Inset
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.

## *eko 1080/90 edwardian timeless*

The beautiful 1080/90 features a 2.0 kW heat output, flame effect only setting – no heat, thermostatic control, timer control, full remote control or buttons on the front of the fire below the canopy. A helpful LED display is located in the top left hand corner of the window which displays, flame brightness, timer and thermostatic control.

The decorative cast iron fascia is hand-crafted and made from authentic iron foundry skills, which are individually polished by hand and available in a satin chrome or matt black finish.

### *eko 1080*

The entry level eko 1080 features an opaque screen which provides a warm flame picture with deep red tones.

### *eko 1090*

The eko 1090 Reflections model features an upgraded screen. A premium piece of reflective glass increases the perceived depth of the fire by reflecting the coal fuel bed into the mirrored glass. This gives a much more realistic and vibrant flame picture and creates the illusion that the flames are originating from between the front and rear reflected coals.

# *eko 1080/90* *finsbury* *timeless*

The beautiful 1080/90 features a 2.0 kW heat output, flame effect only setting – no heat, thermostatic control, timer control, full remote control or buttons on the front of the fire below the canopy. A helpful LED display is located in the top left hand corner of the window which displays, flame brightness, timer and thermostatic control.

The decorative cast iron fascia is hand-crafted and made from authentic iron foundry skills, which are individually polished by hand and available in a satin chrome or matt black finish.

## *eko 1080*

The entry level eko 1080 features an opaque screen which provides a warm flame picture with deep red tones.

## *eko 1090*

The eko 1090 Reflections model features an upgraded screen. A premium piece of reflective glass increases the perceived depth of the fire by reflecting the coal fuel bed into the mirrored glass. This gives a much more realistic and vibrant flame picture and creates the illusion that the flames are originating from between the front and rear reflected coals.

*eko 1080 finsbury with reflections screen*



*standard screen*



*reflections screen*

### *specifications*

Fire Type	LED Electric Fire
Control Type/Location	Manual - Button & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W480 x H595 x D114 mm
Installation	Inset
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.

*model shown:*

eko 1080 Finsbury Timeless polished cast iron with standard screen and coal-effect fuel bed





*model shown:*  
eko 1090 Soho Timeless Reflections

*surround:*  
eko 7020 with Black back panel & hearth



*eko 1080 soho timeless with standard screen*



*standard screen*



*reflections screen*

### *specifications*

Fire Type	LED Electric Fire
Control Type/Location	Manual - Button & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W480 x H595 x D 114 mm
Installation	Inset
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.

## *eko 1080/90 soho timeless*

The beautiful 1080/90 features a 2.0 kW heat output, flame effect only setting - no heat, thermostatic control, timer control, full remote control or buttons on the front of the fire below the canopy. A helpful LED display is located in the top left hand corner of the window which displays, flame brightness, timer and thermostatic control.

The decorative cast iron fascia is hand-crafted and made from authentic iron foundry skills, which are individually polished by hand and available in a satin chrome or matt black finish.

### *eko 1080*

The entry level eko 1080 features an opaque screen which provides a warm flame picture with deep red tones.

### *eko 1090*

The eko 1090 Reflections model features an upgraded screen. A premium piece of reflective glass increases the perceived depth of the fire by reflecting the coal fuel bed into the mirrored glass. This gives a much more realistic and vibrant flame picture and creates the illusion that the flames are originating from between the front and rear reflected coals.




*model shown:*  
eko 1090 Victorian Timeless Reflections

*surround:*  
eko 7090 with Black back panel & hearth



*eko 1080 with standard screen*

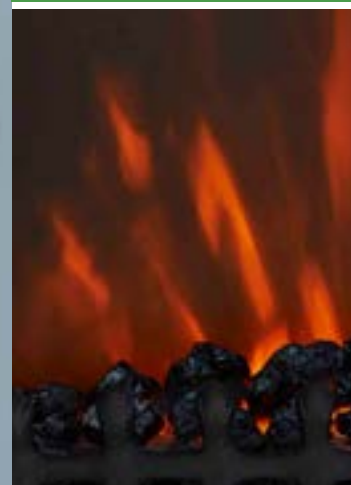

*standard screen*



*reflections screen*

### *specifications*

Fire Type	LED Electric Fire
Control Type/Location	Manual - Button & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W480 x H595 x D114 mm
Installation	Inset
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.

## *eko 1080/90 victorian timeless*

The beautiful 1080/90 features a 2.0 kW heat output, flame effect only setting - no heat, thermostatic control, timer control, full remote control or buttons on the front of the fire below the canopy. A helpful LED display is located in the top left hand corner of the window which displays, flame brightness, timer and thermostatic control.

The decorative cast iron fascia is hand-crafted and made from authentic iron foundry skills, which are individually polished by hand and available in a satin chrome or matt black finish.

### *eko 1080*

The entry level eko 1080 features an opaque screen which provides a warm flame picture with deep red tones.

### *eko 1090*

The eko 1090 Reflections model features an upgraded screen. A premium piece of reflective glass increases the perceived depth of the fire by reflecting the coal fuel bed into the mirrored glass. This gives a much more realistic and vibrant flame picture and creates the illusion that the flames are originating from between the front and rear reflected coals.

## *wall mounted electric fires*

If you're searching for a stylish wall mounted electric fire without forfeiting warmth and efficiency, you're sure to find what you're looking for at eko fires. All of our models feature a flame-effect only setting and simply plug in to the mains. They can be installed in a number of rooms as the unit does not require a chimney or flue. The innovative technology used in our products significantly improves the flame-effect.

*Plug in and enjoy the ambiance.*

### *technical specifications for installation*

Electric fires require a fixed socket within 1.8 meters of the installed location. The socket must be easily accessible and not located directly above the appliance. It is recommended that any open flues be sealed off to prevent down draughts from causing nuisance cut off. These appliances must not be installed into bathrooms or within the immediate vicinity of showers or swimming pools. Do not allow appliances to become covered as this may cause overheating.

### *what safety features are on the appliance?*

All of our electric products are fitted with a thermal trip switch that monitors the temperature inside the appliance and senses any change if it becomes covered or displaced for any reason.

### *can I operate only the flame-effect?*

All electric appliances benefit by having the flame-effect only option.



*eko 1120: page 25-26*

### *benefits of wall mounted electric fires*

- ✿ Easy to use — simply mount on the wall, plug-in, and enjoy.
- ✿ Can be installed on virtually any internal or external wall.
- ✿ Remote control.
- ✿ A wide range of portrait or landscape designs.
- ✿ Timer control options.
- ✿ Full thermostatic control.



*model shown:*  
eko 1011 shown with curved black glass fascia



## *eko 1011*

The eko 1011 is a sleek and sophisticated wall mounted electric fire featuring an ultra stylish curved black glass fascia. At the heart of this fire is a stunning log effect fuel bed with low energy LED flame-effect that radiates a warm glow providing a beautiful focal point in your room of choice.

The eko 1011 can be simply positioned on virtually any flat wall and plugs straight into a mains socket. A discrete bottom mounted fan heater with up to 1.5kW heat output gives a real punch of warmth to your room and better still can be operated from the remote control provided.

*Please note: the LED display is only shown when changing a function.*



### *fuel bed detail*

### *specifications*

Fire Type	Wall Hung LED Electric Fire
Control Type/Location	Manual - Button (Right) & Remote Control
Heat Direction	Downwards
Heat Input (Max/Min) Gross	1.5kW / 0.75kW
Heat Output (Max/Min) Gross	1.5kW / 0.75kW
Dimensions*	W520 x H 620 x D 148 mm
Installation	Wall Mounted
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	N/A

\*Please refer to Technical specification for more information.



*eko 1110 black glass*



*fuel bed detail*

*specifications*

Fire Type	Wall Hung LED Electric Fire
Control Type/Location	Side Manual Buttons & Remote Control
Heat Direction	Downwards
Heat Input (Max) Gross	1.8kW / 0.9kW
Heat Output (Max) Gross	1.8kW / 0.9kW
Dimensions*	W810 x H505 x D160 mm
Installation	Wall mounted
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	Black Glass or Mirrored

\*Please refer to Technical specification for more information.

# *eko 1110*

This versatile and modern eko 1110 electric fires simply hang on the wall. A popular option is to position the fire below a TV thanks to the heater being designed at the bottom.

Our eko 1110 feature: 1.8kW variable heat output, flame-effect only – no heat, five flame picture settings, thermostatic control which automatically turns the heater on and off to your desired temperature, timer, LED flame picture technology, full remote control or buttons on the underside of the fire and has a helpful LED display located in the top right hand corner of the window which displays the heat setting, flame cycle and sleep timer.

## *eko 1110 black glass*

Employing a black glass the flame-effect to be most prominent. This style also exudes a certain kind of evening luxury appeal – making it a great addition to a dining room or lounge.

## *eko 1110 mirrored glass*

Features mirrored glass which adds a dimension of depth and light to a room.

*Please note: the LED display is only shown when changing a function.*

*model shown:*  
eko 1110 Mirrored Glass with log-effect fuel bed



*model shown:*  
eko 1120 Black Glass with crystals fuel bed



*eko 1120 grey glass*



*freestanding option*

### *specifications*

Fire Type	Wall Hung LED Electric Fire
Control Type/Location	Side Manual Buttons & Remote Control
Heat Direction	Downwards
Heat Input (Max) Gross	1.5kW / 0.75kW
Heat Output (Max) Gross	1.5kW / 0.75kW
Dimensions*	W915 x H 440 x D 125 mm w/stand H 550 x D 249 mm
Installation	Wall Mounted / Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	Black or Grey Glass

\*Please refer to Technical specification for more information.

## *eko 1120*

The eko 1120 feature: 1.5kW variable heat output, flame effect only – no heat, four flame picture settings, thermostatic control, timer, LED flame picture technology, full remote control or buttons on the right hand side of the fire and has a helpful LED display located in the top right hand corner of the window which displays the heat setting, flame cycle and sleep timer.

This versatile and modern eko 1120 simply hangs on the wall or can be free-standing. A popular option is to position the fire below a TV due to the heater being designed below the fuel bed.

Please note: the LED display is only shown when changing a function. An additional benefit is that you can also position a TV above the fire as the fan heater is located at the base of the fire for front facing heat (stand fitted) or downwards heat (stand removed).

The eko 1120 come with a choice of three different fuel beds: log effect, plastic crystals and real pebbles.

### *eko 1120 black glass*

Features classic curved black glass.

### *eko 1120 grey glass*

Features curved grey glass.

*Please note: the LED display is only shown when changing a function.*

# eko 1130

The eko 1130 is a stylish wall mounted LED electric fire which features a slimline profile and a sleek curved black glass fascia. With seven LED side-light options and a realistic flame picture, the Lexington creates an impressive Focal Point in your living room.

The eko 1130 features: 1.8 kW variable heat output, flame effect only – no heat, seven colour side lights, adjustable flame brightness, thermostatic control, timer, LED flame picture technology, full remote control or buttons and has a helpful LED display located in the top left hand corner which displays the heat setting, flame cycle and sleep timer.

*Please note: the LED display is only shown when changing a function.*



*seven LED side-light options*



*fuel bed detail*

## specifications

Fire Type	Wall Hung LED Electric Fire
Control Type/Location	Side Manual Buttons & Remote Control
Heat Direction	Downwards
Heat Input (Max) Gross	1.5 kW / 0.75 kW
Heat Output (Max) Gross	1.5 kW / 0.75 kW
Dimensions*	W915 x H 440 x D 125 mm w/ stand H 550 x D 249 mm
Installation	Wall Mounted / Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.



*model shown:*  
eko 1130



model shown:  
eko 1190 Limestone

# eko 1190

The eko 1190 is a wall mounted electric fire that have been designed to combine the natural stone front with the latest LED electric fire technology. The high-brow aesthetic equally suits a contemporary and modern, interior décor.

The innovative polished eko 1190 polished granite or limestone frame is manufactured using a clever aluminium honeycomb subframe. This process not only helps to increase the manufacturing precision but also helps to reduce the weight so it can be wall mounted.

It features a 1.5 kW variable heat output, flame effect only – no heat, four flame picture settings, thermostatic control, timer, LED flame picture technology, full remote control or buttons on the right hand side of the fire and has a helpful LED display located in the top right hand corner of the window which displays the heat setting, flame cycle and sleep timer.

## eko 1190 granite

Features a Polished Granite frame

## eko 1190 limestone

Features a Limestone frame

*Please note: the LED display is only shown when changing a function.*



### eko 1190 granite



### specifications

Fire Type	Wall Hung LED Electric Fire
Control Type/Location	Side Manual Buttons & Remote Control
Heat Direction	Downwards
Heat Input (Max/Min) Gross	1.5kW / 0.75kW
Heat Output (Max/Min) Gross	1.5kW / 0.75kW
Dimensions*	W 1100 x H 385 x D 140 mm
Installation	Wall Mounted
Air Vent Required	N/A
Safety	Thermal Trip Switch
Options	Black Granite or Limestone

\*Please refer to Technical specification for more information.



## *electric suites & stoves*

*W*hen it comes to electric suites and stoves they make a glorious focal point bringing ambiance and life to any setting with realistic LED flame technology. Our freestanding electric suites come in a variety of styles from traditional all-in-one insets to modern suites that include a LED stove. Each one showcasing an exquisite flame-effect. Equally appealing and easy to install are our stoves which are also available in a range of styles.

*Plug in and enjoy the ambiance.*

### *technical specifications for installation*

Electric fires require a fixed socket within 1.8 meters of the installed location. The socket must be easily accessible and not located directly above the appliance. It is recommended that any open flues be sealed off to prevent down draughts from causing nuisance cut off. These appliances must not be installed into bathrooms or within the immediate vicinity of showers or swimming pools. Do not allow appliances to become covered as this may cause overheating.

### *what safety features are on the appliance?*

All of our electric products are fitted with a thermal trip switch that monitors the temperature inside the appliance and senses any change if it becomes covered or displaced for any reason.

### *can I operate only the flame-effect?*

All electric appliances benefit by having the flame-effect only option.



*eko 1230: page 39 – 40*

### *benefits of electric suites & stoves*

- ✿* No chimney or flue required.
- ✿* Easy to use — simply take home, plug-in, enjoy.
- ✿* Can be installed on an any indoor wall within 1.8m of a plug.
- ✿* A wide range of traditional and modern designs.
- ✿* Remote control and / or simple to use controls.
- ✿* Timer control options.
- ✿* Full thermostatic control.

# eko 1200

The eko 1200 Complete Suite features an all white surround, back panel and hearth. The fireplace suite has a 1.5kW heater with a realistic log effect fuel bed.

The realistic flame-effect can be used independently of the heater. The fire also features an LED display, remote control, timer and thermostatic control options, heat setting, flame cycle and sleep timer.

Assembly is required.

*Please note: the LED display is only shown when changing a function.*



*fuel bed detail*

## specifications

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.5kW / 0.75kW
Heat Output (Max/Min) Gross	1.5kW / 0.75kW
Outline Dimensions*	W1140 x H886 x D330 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.



*model shown:*  
eko 1200 Complete Suite



*model shown:*  
eko 1210 Complete Suite



*front controls and heat vent*



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.5kW / 0.75kW
Heat Output (Max/Min) Gross	1.5kW / 0.75kW
Outline Dimensions*	W1140 x H872 x D330 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1210*

The eko 1210 is a complete suite with a grey surround and hearth with oak veneer mantle.

The fireplace suite has a 2.0kW heater with a realistic log effect fuel bed. The realistic flame-effect can be used independently of the heater and the fire also features an LED display, remote control, timer and thermostatic control options.

Assembly is required.

*Please note: the LED display is only shown when changing a function.*



*model shown:*  
eko 1220 Complete Suite



*three-sided glass*



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W1080 x H690 x D235 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1220*

The eko 1220 Complete Suite arrives fully assembled. This contemporary electric suite combines a white surround, glass side panels and subtle graphite hidden base to finish. The glass side panels allows you to see the real pebble fuel bed in a 180° view.

The fireplace suite has a 2.0 kW and features a realistic flame-effect which can be used independently of the heater. The fire also features four different flame heights controlled via remote handset.


*Please note: the LED display is only shown when changing a function.*



*model shown:*  
eko 1230 Slate Complete Suite



*eko 1230 brick*

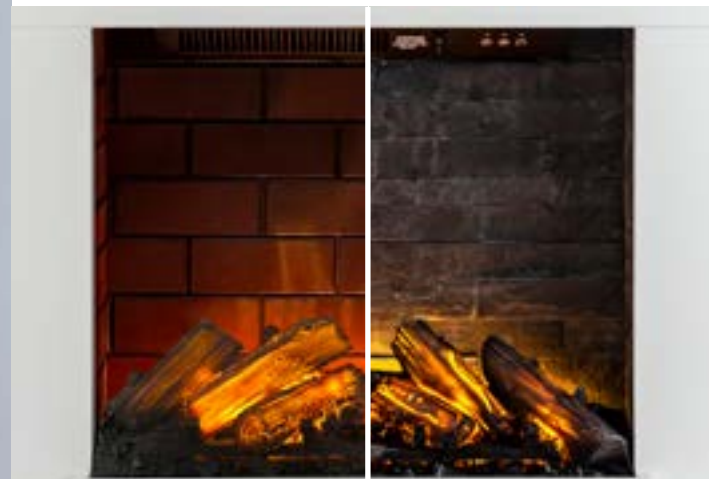

*brick detail*

*slate detail*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W1000 x H800 x D240 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1230*

This complete electric fireplace suite is fully assembled with a 2.0 kW heater and can be installed against a flat wall. Simply plug it in the eko 1230 to get that warm glow and heat from the variable fan heater.

The flame-effect can be used independently of the heater and the fire also features an LED display, remote control, timer, and thermostatic control options.

### *eko 1230 brick insert*

The eko 1230 is an electric suite that features a *brick-style back panel* with a white surround and hearth with a realistic log-effect fuel bed.

### *eko 1230 slate insert*

The eko 1230 is an electric suite that features a *slate-style back panel* with a white surround and hearth with a realistic log-effect fuel bed.

*Please note: the LED display is only shown when changing a function.*



*model shown:*  
eko 1250 Complete Suite



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W1140 x H867 x D330 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1250*

The eko 1250 complete electric fireplace suite is a fully assembled electric fire. It features an all white surround, marble-effect panel and hearth. The fireplace suite has a 2.0kW heater with a realistic log effect fuel bed.

The realistic flame effect can be used independently of the heater and the fire also features an LED display, remote control, timer and thermostatic control options.

*Please note: the LED display is only shown when changing a function.*



*model shown:*  
eko 1260 Complete Suite



*front controls and heat vent*



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W1080 x H690 x D235 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1260*

The eko 1260 complete electric fireplace is an all white surround, marble-effect panel and hearth. The fireplace suite has a 2.0 kW heater with a realistic log effect fuel bed.

The realistic flam-effect can be used independently of the heater and the fire also features an LED display, remote control, timer and thermostatic control options.

Assembly is required.

*Please note: the LED display is only shown when changing a function.*



*model shown:*  
eko 1270 Black Complete Suite



*eko 1270 white*



*side downlights on*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Front Buttons & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W1080 x H690 x D235 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1270*

The eko 1270 LED Electric Suite features a 2.0 kW heater with a realistic log effect fuel bed. The realistic flame effect can be used independently of the heater. The fire also features an LED display, remote control, timer, and thermostatic control options.

Installation can be completed as either wall hung or freestanding.

### *eko 1270 black*

Black suite.

### *eko 1270 white*

White suite.

*Please note: the LED display is only shown when changing a function.*





*model shown:*  
eko 1400 Black

*hearth:* black



*eko 1400 sage grey*



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Stove
Control Type/Location	Manual Front
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.85kW / 0.925kW
Heat Output (Max/Min) Gross	1.85kW / 0.925kW
Dimensions*	W635 x H670 x D360 mm
Stove Pipe Dimensions*	W170 x H280 x D220 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1400*

The eko 1400 LED stove both feature a 1.85kW heater with a realistic log effect fuel bed. The realistic flame-effect can be used independently of the heater and the fire also features an LED display, remote control, timer, and thermostatic control options.

The double-door design acts as one and can be opened which gives access to a control panel.

### *eko 1400 black*

Black LED stove.

### *eko 1400 sage grey*

Sage grey LED stove.

---

*optional upgrade: stove pipe*

---





model shown:  
eko 1410 black

optional upgrade:  
stove pipe



*eko 1410 grey*



*eko 1410 burgundy*



*eko 1410 cream*

## *eko 1410*

The eko 1410 electric stove is a modern design in a vibrant retro finish. It also features technology designed to significantly improve the flame picture and running performance. The eko 1410 is freestanding allowing you to stand in almost any location or position. The mains power lead is approx. 1.6 m long.

The controls are discretely positioned behind the drop-down ashpan. To keep operation simple there are two rotary dials which control the thermostat and flame intensity, and four switch settings.

A discrete fan heater provides forward directional heat and is of good quality to reduce operating noise. The eko 1410 can be selected to operate without heat for a cool summer breeze.

### *eko 1410 black*

Black LED stove

### *eko 1410 burgundy*

Burgundy LED stove

### *eko 1410 cream*

Cream LED stove

### *eko 1410 grey*

Grey LED stove

#### *specifications*

Fire Type	LED Electric Stove
Control Type/Location	Manual Front
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.8 kW / 0.9 kW
Heat Output (Max/Min) Gross	1.8 kW / 0.9 kW
Dimensions*	W635 x H670 x D360 mm
Stove Pipe Dimensions*	W170 x H280 x D220 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

*optional upgrade: stove pipe*





*model shown:*  
eko 1420 Black

*hearth:*  
black



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Stove
Control Type/Location	Manual Front
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.8 kW / 0.9 kW
Heat Output (Max/Min) Gross	1.8 kW / 0.9 kW
Dimensions*	W510 x H560 x D310 mm
Stove Pipe Dimensions*	W170 x H280 x D220 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

# *eko 1420*

The eko 1420 electric stove is a modern design in a vibrant retro finish. It features technology designed to significantly improve the flame picture and running performance.

By its nature it is freestanding allowing you to place it in almost any location or position.

The controls are discretely positioned behind the drop-down ashpan. To keep operation simple there are two rotary dials which control the thermostat and flame intensity, and four switch settings.

A discrete fan heater provides forward directional heat and is of good quality to reduce operating noise. The eko 1420 can be selected to operate without heat for a cool summer breeze. Additionally, a great feature of this product is that you can set it to a flame effect only setting so you can enjoy the look and feel of a flickering flame (without heat) for an all year round focalpoint.

*optional upgrade: stove pipe*





model shown:  
eko 1430 Black

hearth:  
black



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Stove
Control Type/Location	Manual Front
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Dimensions*	W550 x H436 x D245 mm
Stove Pipe Dimensions*	W170 x H280 x D220 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1430*

Our eko 1430 freestanding electric stove is a convenient source of heat. Producing 2.0 kW of warm air also displays a realistic LED flame-effect with the option to use with or without heat.

A simple control panel to operate the fire is discretely stowed under a front panel.

*optional upgrade: stove pipe*





*model shown:*  
eko 1500 Complete Suite



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Suite
Control Type/Location	Manual Front & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Outline Dimensions*	W1000 x H943 x D225 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.

## *eko 1500*

The eko 1500 is a classic inset electric fire suite combines a white surround, brass-effect inset electric fire with a coal-effect fuel bed.

The fireplace has no recess so it can be installed against a flat wall it is simple to install, just unbox, fasten in place and plug it in.

The fireplace suite has a 2.0 kW and features a realistic flame effect which can be used independently of the heater and the fire also features four different flame heights and a remote control.



*model shown:*  
eko 1510 Complete Suite

## *eko 1510*

The eko 1510 stove suite will add a fantastic new feature to your room. The suite, which needs assembly, can be installed against a flat wall. Then simply plug it in to give you that warm glow from the LED flame-effect and heat from the variable fan heater in the stove.

The LED stove has a 1.5kW heater and realistic flame-effect which can be used independently of the heater. The fire also features four different flame heights and can be controlled via remote handset.



### *fuel bed detail*

### *specifications*

Fire Type	LED Electric Stove & Suite
Control Type/Location	Manual Front & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.5kW / 0.75kW
Heat Output (Max/Min) Gross	1.5kW / 0.75kW
Outline Dimensions*	W1120 x H1000 x D350 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.



*model shown:*  
eko 1520 Complete Suite

## *eko 1520*

The eko 1520 stove suite provides a classic feature to any room. The suite, which needs assembly, can be installed against a flat wall. Simply plug it in to give you that warm glow from the LED flame-effect and heat from the variable fan heater in the stove.

The fireplace suite has a 2.0 kW and features a realistic flame-effect which can be used independently of the heater and the fire also features four different flame heights and a remote control.



*fuel bed detail*

### *specifications*

Fire Type	LED Electric Stove & Suite
Control Type/Location	Manual Front & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.5 kW / 0.75 kW
Heat Output (Max/Min) Gross	1.5 kW / 0.75 kW
Outline Dimensions*	W1120 x H1000 x D350 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.



*model shown:*  
eko 1530 Complete Suite



*fuel bed detail*

## *eko 1530*

The eko 1530 stove suite provides a modern centre-piece to any room. The oak & grey suite, which needs assembly, can be installed against a flat wall. Simply plug it in to give you that warm glow from the LED flame-effect and heat from the variable fan heater in the stove.

The fireplace suite has a 1.5kW and features a realistic flame-effect which can be used independently of the heater and the fire also features four different flame heights and a remote control.

### *specifications*

Fire Type	LED Electric Stove & Suite
Control Type/Location	Manual Front & Remote Control
Heat Direction	Frontwards
Heat Input (Max/Min) Gross	1.5kW / 0.75kW
Heat Output (Max/Min) Gross	1.5kW / 0.75kW
Outline Dimensions*	W1120 x H1000 x D350 mm
Installation	Freestanding
Air Vent Required	N/A
Safety	Thermal Trip Switch

\*Please refer to Technical specification for more information.



# energy **RATED A** flueless gas fires & stoves

Eko flueless fires use a technology we call Pure Heat™. It is a catalytic technology which releases all of the heat generated into the room – resulting in neither a chimney nor flue to be required for installation.

## your questions answered

### can I have a flueless gas fire or stove?

Our exciting range of flueless gas fires and stoves are the perfect flat wall, no chimney solution to instant warmth. Our innovative technology provides a flexible design for your house or apartment, allowing you to install a fire not only in the living room, but also dining room, office, study and kitchen.\*

If you have a natural gas supply\*\* and can run a standard 8mm gas pipe to the fire installation point, while ensuring you have the minimum room size and adequate ventilation you can benefit from this technology.

\*Flueless fires are not permitted in bathrooms.

\*\*Available in natural gas (NG). Selected models are also available in LPG.

### how does this work?

Flueless fires incorporate the best in gas fire technology and do not need a chimney or flue to operate. Instead, the combustion gases pass through a catalytic converter positioned at the top of the stove. This converts carbon monoxide into harmless carbon dioxide and water vapour, levels of which are so low they are typically present in fresh air. The catalytic converter works so effectively that it helps to clean the air by neutralising airborne particles and odours, therefore, helping to reduce household allergens.

### what is the life span of a catalytic converter?

Independent tests established the life expectancy of the catalytic converter have proven that even after 16,957 hours (approximately equivalent to 27 years and eight months of normal use)\* the catalytic converter is as effective as when it is new.

\*Calculation is based on the assumption of 4 hours a day for 5 months of the year.

### are they safe?

For complete safety and peace of mind all of our fires incorporate an Oxygen Depletion Sensor (ODS), which detect when the oxygen levels in the room fall below a specified level and cause the pilot flame to lift away from the sensing probe. This activates the Flame Failure Device (FFD), which cuts off the gas supply to the fire and renders the appliance safe. For additional safety, all of our flueless fires are fitted with a catalytic converter system to ensure excellent levels of air quality.

### what ventilation is required?

Most heating appliances need ventilation to maintain the correct level of oxygen in the room. All of our flueless appliances installed in the UK require only 100 cm<sup>2</sup> of additional purpose provided ventilation.\*

\*For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm.

### what about condensation?

All of our flueless fires are designed to supplement central heating and should be used as a secondary heat source only. Therefore, the ambient temperature of the room should prevent any moisture from condensing on colder surfaces such as single glazed windows.

### what about installation & servicing?

All gas fires must be installed by a Gas Safe registered engineer. Flueless fires are very popular with fitters as they are relatively simple to install and can be fitted in literally a fraction of the cost and time it takes to fit a conventional gas fire. We also provide a fitting template with every flueless fire to help with installation. Because flueless fires do not require the use of a chimney or flue for operation the servicing costs are considerably cheaper than conventional gas fires

### eco-friendly

Flueless technology has been awarded five stars for *eco value for money*, by leading eco-consultant Donnachadh McCarthy. *Article from Sunday Times, 2006.*

If the 15 million flued gas fires in the UK were replaced by flueless fires, we would save 40,260,000,000 kW of gas every year which would in turn reduce carbon dioxide emissions by over 7,649,400 tonnes every year.\*

\*Calculation is based on the assumption of 4 hours a day for 5 months of the year.

A flueless gas fire converts 100% of the gas to heat unlike open coal burning fires, which, convert as little as 10%. Typically, running costs are less than 9 pence per hour on high, which is approximately a third of the running cost of a conventional gas fire. By choosing a flueless gas fire it is possible to lowering your carbon footprint and also lowering gas bills.

Flueless fires must be installed by a Gas Safe registered engineer in accordance with the manufacturer's instructions. Flueless fires are not permitted in the bathroom.

# steps to choosing the appropriate flueless gas fire or stove:

## *determine your room size*

First, measure the length, width, and height (in feet) of the space. Where dimensions include inches, please convert these into fractions (see example 1). Multiply the three values together and then divide by a conversion factor of 35.3.

The result is the cubic capacity in meters of your room. This will determine which fire's heat output is appropriate for your room size. This is only a guide and it is perfectly acceptable to choose a fire with a lower heat output for aesthetic reasons; however, you must not select a fire with a heat output that is rated for a greater room size.

## *how to calculate in feet*

Calculate room size:  
(m<sup>3</sup>) = Length x Width x Height  
(feet) / 35.3

Calculating the maximum fire for a room size measuring 10' 4" (L) x 11' 7" (W) x 8' (H)

Converting inches to feet, there are 12" a foot so, 4" = 4/12 = 0.33

So, max. room size =  
(10.33 x 11.58 x 8) / 35.3 = 27.11

## *how to calculate in metres*

If you are measuring in metres then simply multiply the length by the width, by the height, to calculate the volume in m<sup>3</sup>.

Calculate room size (m<sup>3</sup>) =  
L x W x H (metres)

3.16 m (L) x 3.53 m (W) x 2.43 m  
(H) = 27.11

Thus, the 23 m<sup>3</sup> model in either Portrait or Landscape format is the right fire for this room size.

## *choose a location*

Having selected the correct model you will need to choose a location. First ensure a gas supply can be run to your desired location. The fires generally can be mounted onto almost any flat surface. There must be a minimum clearance to the sides of the fire of 100 mm and 500 mm in front. Clearance to ceilings and floor will vary depending on the type of model. Please check with the installation instructions.

## *ensure there is adequate ventilation:*

Check to see if an air brick / air vent is located in your room, a lot of new homes will have an air brick fitted already.

If your room does not have an air vent fitted that is a minimum of 100 cm<sup>2</sup>, vented directly to the outdoors then one will need to be installed. Modern air vents allow sufficient ventilation into a room but will stop draughts, light and insects coming through, they are also less draughty than a conventional flue / chimney.



eko 5090 – page 67

## *why choose flueless?*

- 🌿 Energy Efficiency Class A rated
- 🌿 100% (Direct) energy efficient
- 🌿 No chimney or flue required
- 🌿 Simple hang on the wall designs – no recess required
- 🌿 No hearth required (stove and wall mounted models only)
- 🌿 Inset hearth mounted designs for traditional fireplace installations
- 🌿 Pure Heat™ catalytic technology
- 🌿 Can be installed onto virtually any internal or external wall
- 🌿 Cleans air of unwanted particles neutralising odours and allergens



model shown:  
eko 5010



## eko 5010

Designed for contemporary living where space is a premium. A stylish fire delivering an impressive heat performance you won't want to live without.

The eko 5010 is built on the popular 23 m<sup>3</sup> portrait platform. Simply turn the control knob and the pilot will ignite positively. Continue to rotate, and the flame picture can be adjusted from low (1.0 kW Gross) through to high (2.0 kW Gross), to ensure optimum comfort.

It features a slimline profile with stylish mirror reflective fascia. Despite its small size the 5010 delivers a good heat output and is suitable for a minimum room size of 23 m<sup>3</sup> (approx 3.1 m x 3.1 m with an average 2.4 m ceiling height) is required along with a 100 cm<sup>2</sup> air vent in the room of installation. The 5010 seamlessly integrates into your living space providing a modern focal point to any room where space is a premium.

(Typically 10'1" x 10'1" with an 8' high ceiling) the portrait format is the perfect focal point for your kitchen, dining room, study and living room.

### *fuel bed detail*

#### *specifications*

Minimum Room Size	23 m <sup>3</sup>
Model Identifier	P23 Flueless Gas Fire Gas Category: 12H(20)
Control Type/Location	Manual - Rotary (Right)
Heat Input (Max/Min) Gross	2.0 kW / 1.0 kW
Heat Output (Max/Min) Gross	2.0 kW / 1.0 kW
Energy Efficiency Class	A
Direct Heat Output	1.8 kW
Outline Dimensions*	W 525 x H 585 x D 150 mm
Installation	Wall mounted
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Natural gas & LPG

\* Please refer to Technical & Tailoring specification for more info.  
 † For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.



model shown:  
eko 5060



## eko 5060

Contemporary elegance, inspired beauty and an impressive performance designed to complement a modern lifestyle.

Based on the flexible 23 m<sup>3</sup> landscape platform the eko 5060 is the perfect solution to instant gas fire warmth. In addition to its compact size and shape, the eko 5060 produces an impressive heat output of 2.0 kW (Gross), enough to make a real difference to your living space. The simple clean lines and reflective glass fascia makes it a perfect focal point in your living room, study, or dining room.

### *fuel bed detail*

### *specifications*

Minimum Room Size	23 m <sup>3</sup>
Model Identifier	L23 Flueless Gas Fire Gas Category: 12H(20)
Control Type/Location	Manual - Rotary (Right)
Heat Input (Max/Min) Gross	2.0kW / 1.3kW
Heat Output (Max/Min) Gross	2.0kW / 1.3kW
Energy Efficiency Class	A
Direct Heat Output	1.8 kW
Outline Dimensions*	W635 x H 475 x D 147 mm
Installation	Wall mounted
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Natural gas & LPG

\* Please refer to Technical & Tailoring specification for more info.  
 † For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.



model shown:  
eko 5070



*fuel bed detail*

## eko 5070

Crisp, clean lines reflect its simple modern aesthetic. The selective use of a monochromatic palette complements any interior backdrop allowing the vibrant flames to become centre of attention.

The eko 5070 flueless gas fire creates a stunning feature in any environment. The sophisticated flat-glass fascia with strong exterior angles creates a sense of understated elegance for the modern interior. Designed to fit a minimum room size of 30 m<sup>3</sup> (typically 11' 6" x 11' 6" with an 8' high ceiling) the eko 5070 can be installed on virtually any wall and gives you the freedom to create a stunning style statement without the limitations of a flue or chimney.

### *specifications*

Minimum Room Size	30 m <sup>3</sup>
Model Identifier	L30 Flueless Gas Fire Gas Category = I2H(20)
Control Type/Location	Manual - Rotary (Right)
Heat Input (Max/Min) Gross	2.6kW / 1.5kW
Heat Output (Max/Min) Gross	2.6kW / 1.5kW
Energy Efficiency Class	A
Direct Heat Output	2.3kW
Outline Dimensions*	W1000 x H600 x D180 mm
Installation	Wall mounted
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Natural gas & LPG

\* Please refer to Technical & Tailoring specification for more info.  
† For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.



model shown:  
eko 5090 Limestone



eko 5090 granite



fuel bed detail

### specifications

Minimum Room Size	30 m <sup>3</sup>
Model Identifier	L30 Flueless Gas Fire Gas Category = I2H(20)
Control Type/Location	Manual – Rotary (Right)
Heat Input (Max/Min) Gross	2.6kW / 1.5kW
Heat Output (Max/Min) Gross	2.6kW / 1.5kW
Energy Efficiency Class	A
Direct Heat Output	2.3kW
Outline Dimensions*	W1100 x H385 x D185 mm
Installation	Wall mounted
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Polished Granite Limestone

\* Please refer to Technical & Tailoring specification for more info.  
† For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.

## eko 5090

With its landscape format, clean lines, and chamfered edging details this simple wall hung gas fire adds a touch of luxury to any room.

Our eko 5090 has been designed to explore the finest natural stone materials, delivering a high end aesthetic that works equally in a contemporary, modern, traditional or classical décor.

The innovative natural stone fascia is manufactured using a clever aluminium honeycomb sub-frame. This process not only helps to increase the manufacturing precision when dealing with natural materials but reduces the weight of the fascia by over 50%.

Behind this stunning fascia is our innovative flueless catalytic technology which delivers the ultimate in efficiency, significantly reducing the running cost while all the time reassuring you that it is one of the safest gas fire technologies in the world.

The 5090 has a fully variable heat output from 1.5kW (Gross) low to 2.6kW (Gross) high. It is designed for a minimum room size of 30 m<sup>3</sup> (typically 11' 6" x 11' 6" with an 8' high ceiling).

### eko 5090 granite

Polished Granite fascia

### eko 5090 limestone

Limestone fascia



model shown:  
eko 5510 with Mono Chrome FRT420



eko 5510 w/ elegance chrome & black FRT230



fuel bed detail w/ blenheim brass FRT 310

### specifications

Minimum Room Size	27 m <sup>3</sup>
Model Identifier	PI27 Flueless Gas Fire Gas Category = I2H(20)
Control Type/Location	Manual - Rotary (Bottom)
Heat Input (Max/Min) Gross	2.3 kW / 1.3 kW
Heat Output (Max/Min) Gross	2.3 kW / 1.3 kW
Energy Efficiency Class	A
Direct Heat Output	2.1 kW
Outline Dimensions*	W 495 x H 620 x D 92 mm
Installation	Inset Fireplace
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Choice of frets & frames*

\* Please refer to Technical & Tailoring specification for more info.  
† For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.

## eko 5510

Modern clean lines or traditional elegance. The classic appeal of the flueless inset fire provides a combo of benefits from our modern catalytic technology.

The eko 5510 features all the benefits of the inset flueless engine; 100% (Direct) energy efficient, reduced running costs, simple installation, realistic coal fuel bed and a clean burning ribbon burner. Choose from a range of selected frets and one-piece Classic Plain frames to personalise your fire.

The eko 5510 does not require a chimney or flue therefore all the heat generated is distributed into the room and none is lost up the chimney. This clever technology not only saves money on installation but significantly reduces the running cost.

A 43 mm spacer frame is fitted as standard to suit a 100 mm/4" rebated surround. Should you require this fire to be installed in a 75 mm/3" rebated surround you will require a 75 mm spacer (Not included). For a flat wall fix a 155 mm spacer is required (Not included).

The only considerations when installing this appliance are a minimum room size of 27 m<sup>3</sup>, an accessible gas supply and adequate ventilation.

See pgs 99-100 for more fret & frame options



model shown:  
eko 6010 Arch Black



eko 6010 white open



fuel bed detail

### specifications

Minimum Room Size	35 m <sup>3</sup>
Model Identifier	L35 Flueless Gas Stove Gas Category = I2H(20)
Control Type/Location	Manual – fingerslide control
Heat Input (Max/Min) Gross	3.1 kW / 1.5 kW
Heat Output (Max/Min) Gross	3.1 kW / 1.5 kW
Energy Efficiency Class	A
Direct Heat Output	2.8 kW
Outline Dimensions*	W615 x H630 x D385 mm
Installation	Freestanding
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Black, burgundy or white, arch or open door design*

\* Please refer to Technical & Tailoring specification for more info.  
† For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.

## eko 6010

Flueless gas stoves are the latest must-have in home decoration. Powerful and amazingly versatile heat. At last, a gas stove that is equally at home in urban city living as it is in rural country abodes.

The eko 6010 flueless gas stove looks and feels like a real wood burner but doesn't have any of the drawbacks of a solid fuel stove. No chimney or flue is required, no storage is required for the logs and a flueless gas stove does not require cleaning after use. The simplicity of gas at your finger tips and control of heat provides a system that is far superior to operate and cleaner to maintain. In addition to these benefits a flueless stove will be significantly cheaper to install and run.

The flueless stove engine features all the benefits of innovative catalytic technology; 100% (Direct) energy efficient, reduced running costs, simple installation and a new clean burning ribbon burner. As no chimney is required 100% of the heat is distributed into the room, making this stove not only an extremely reliable source of heat but very affordable.

Flueless gas stoves require a minimum room size of 35 m<sup>3</sup> (typically 12' 6" x 12' 6" x 8') and 100 cm<sup>2</sup> of purpose provided ventilation.

The eko 6010 features a beautiful solid cast iron body and is available in matt black, semi gloss burgundy or white finish. At the heart of the stove is a large glass window that allows the fire to be enjoyed in all its beauty. There are two door designs to choose from: open or arch. And, finally to add detail and complement the overall aesthetic, a matching door handle and slide control handle is finished in brushed stainless steel.

See pgs 99-100 for more fret & frame options





model shown:  
eko 6030 Black



eko 6030 burgundy



eko 6030 white

### specifications

Minimum Room Size	35 m <sup>3</sup>
Model Identifier	L35 Flueless Gas Stove Gas Category = I2H(20)
Control Type/Location	Manual – fingerslide control
Heat Input (Max/Min) Gross	3.1 kW / 1.5 kW
Heat Output (Max/Min) Gross	3.1 kW / 1.5 kW
Energy Efficiency Class	A
Direct Heat Output	2.8 kW
Outline Dimensions*	W615 x H637 x D320 mm
Installation	Freestanding
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Black, burgundy or white*

\* Please refer to Technical & Tailoring specification for more info.  
 † For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.

## eko 6030

The clean crisp lines and the large open door design of the eko 6030 flueless gas stove makes for a stunning addition to any living space.

The eko 6030 flueless gas stove looks and feels like a real wood burner but doesn't have any of the drawbacks of a solid fuel stove. No chimney or flue is required, no storage is required for the logs and a flueless gas stove does not require cleaning after use. The simplicity of gas at your finger tips and controllability of heat provides a system that is far superior to operate and cleaner to maintain. In addition to these benefits a flueless stove will be significantly cheaper to install and run.

The flueless stove engine features all the benefits of innovative catalytic technology; 100% (Direct) energy efficient, reduced running costs, simple installation and a new clean burning ribbon burner. As no chimney is required 100% of the heat is distributed into the room making this stove not only an extremely reliable source of heat but an affordable one.

Flueless gas stoves require a minimum room size of 35 m<sup>3</sup> (typically 12'6" x 12'6" x 8') and 100 cm<sup>2</sup> of purpose provided ventilation.

The eko 6030 features a fabricated metal body and is available in matt black, matt burgundy or white finish. At the heart of the stove is a large glass window that allows the fire to be enjoyed in all its beauty. And, finally to add detail and complement the overall aesthetic, a matching door handle and slide control handle is finished in brushed stainless steel.

See pgs 99–100 for more fret & frame options

# high efficiency glass fronted flued gas fires

Our high efficiency range of flued gas fires, incorporate a glass front which optimises heat performance and efficiency while providing a traditional appearance which costs less to run.

## your flueless gas questions answered

### can I have a glass fronted high-efficiency flued gas fire?

Yes, providing you currently have a working fireplace with gas supply and suitably sized fire aperture. See Technical Specification page for dimensions.

\*Designed for natural gas only.

### how does this work?

The glass front significantly reduces the warm room-air being drawn up the chimney or flue. In addition to this the convection air design draws in present cold room-air and circulates this through the hotbox to produce convected hot air back into the room. This increases and optimises performance.

### are they safe?

For complete safety and peace of mind all of our fires incorporate an Oxygen Depletion Sensor (ODS), which detect when the oxygen levels in the room fall below a specified level and cause the pilot flame to lift away from the sensing probe. This activates the Flame Failure Device (FFD), which cuts off the gas supply to the fire and renders the appliance safe.

### what about installation & servicing?

All gas fires must be installed by a Gas Safe registered engineer. We have designed this fire with the installer in mind so that installation including future servicing is made simple with minimal effort and disruption.



eko 4010 with blenheim brass FRT310 – page 78

## benefits of high efficiency glass fronted flued gas fires

- Choose between modern or traditional glass fronted inset gas fires
- The name says it all – they are highly efficient at heating up your room.
- Safety features such as the ODS and FFD will give you peace of mind.
- The glass fronted feature helps with the heat efficiency and also acts as an additional safety feature.
- It is compatible with most pre-cast flues, pre-fabricated flue systems and conventional class 1 brick built chimneys.



*model shown:*  
eko 4010 with Mono Chrome Fret FRT420 & Classic Inlay Chrome Frame FRM40



*eko 4010 w/ blenheim chrome & black FRT430*

### specifications

Minimum Room Size	27 m <sup>3</sup>
Model Identifier	PI27 Flueless Gas Fire Gas Category = I2H(20)
Control Type/Location	Manual - Rotary (Bottom)
Heat Input (Max/Min) Gross	2.3 kW / 1.3 kW
Heat Output (Max/Min) Gross	2.3 kW / 1.3 kW
Energy Efficiency Class	A
Direct Heat Output	2.1 kW
Outline Dimensions*	W 495 x H 620 x D 92 mm
Installation	Inset Fireplace
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Catalytic converter Glass fronted
Available in	Choice of frets & frames*

\* Please refer to Technical & Tailoring specification for more info.  
† For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm. This product is not suitable for primary heating purposes.

# eko 4010

## eko 4010

The eko 4010 reinvents the traditional flued inset coal-effect gas fire. The discrete glass front helps increase performance by reducing the amount of heat input required while the patented safety draft diverter system increases safety in the event of a flue draft reversal.

What makes this glass fronted inset gas fire so great is that it fits multiple flue installations. It is compatible with most pre-cast flues, pre-fabricated flue systems (class 1 or class 2 with min. 127mm / 5" diameter or greater) and conventional class 1 brick built chimneys. The multi-flue firebox fits a standard fireplace opening, typically 16" wide x 22" high and requires a minimum fireplace depth of only 125mm, plus 20mm for debris collection.

## eko 4015

The eko 4015 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*



*See pgs 99-100 for more fret & frame options*

# conventional flued gas fires

The main consideration when choosing your gas appliance will be compatibility with your existing flue provision. Whether your home has a flue, a chimney, or none at all, it is still possible to have an ekofires product.


## steps to choosing an appropriate inset fire:

### 1. determine your flue type

There are three common types of chimney/flue found in UK houses today, these are a brick chimney, a pre-cast flue and a pre-fabricated flue. The simplest and quickest way of determining which you have is to look up to the roof of your building.


#### A. traditional chimney

This is a conventional roof chimney. It relies on the natural circulation of air through the room and up the chimney to expel the fires' combustion gases.



#### B. pre-cast flue


Designed as a rectangular hollow made of concrete or clay blocks that travel vertically, up through the wall of your property, to a ridge vent or metal flue terminal on the roof.



terminal on the roof.

#### C. pre-fabricated flue

These are usually a metal interlocking flue connected to a flue box, with a terminal as shown on your roof, creating the same circulation of air as a chimney.



### 2. determine your opening dimensions

Next you will need to determine the size of your fireplace opening. Measure the width, height and depth of the aperture to ensure you can accommodate the fire and (where applicable) a debris collection space at the rear of the fire (up to 60 mm) to allow any material that may fall down the flue/chimney to drop to the bottom of the void. If you are drawn to a fire that does not fit your available dimensions you may wish to contact a qualified engineer/builder who may be able to increase or decrease the opening dimensions to suit.

### 3. questions

If you have any questions or queries then you may wish to visit your local eko fires retailer for friendly impartial advice or for a pre-installation survey.

## more steps to choosing an appropriate inset fire:

### what are the running costs of these appliances?

The running costs of each appliance can be calculated quite simply using the following calculation: Running Cost = Energy Input (Gross) x Your Gas Bill Tariff.

Example: Energy Input (Gross) 6.2kW x Gas Bill Tariff (Gross) 4.27p/kWh = Running Cost 26.5p per hour.

Your Gas Bill Tariff figure can be taken from a recent gas bill. Alternatively contact your gas provider for this information.

### what safety features are incorporated into the appliances?

All gas fires are fitted with an oxygen depletion sensor (ODS), and all fires have a flame failure device (FFD), for complete safety and peace of mind. Certain appliances within the range have individual safety features detailed within this brochure.

### what are oxygen depletion sensors & flame supervision devices?

An Oxygen Depletion Sensor (ODS) detects when oxygen levels in the room fall below a specified level and cause the pilot flame to lift away from the sensing probe. This activates the flame failure device (FFD), which cuts off the gas supply to the fire and renders the appliance safe.

### are the fires easy to light and operate?

As standard all of our fires come with a rotary control knob, which incorporates a piezo spark ignition, and is fully variable between the preset high and low settings. The rotary control knob is located at the bottom of the fire, behind the decorative fret or frame.

Selected appliances are available with a fingerslide control which is located on the top right-hand side of the fire. The remote control option enables the

appliance to be controlled from the comfort of your armchair, a feature especially beneficial to the elderly, disabled or infirm.

### do the appliances require an electrical supply?

Our range of manual rotary control fires feature a piezo spark ignition therefore do not require a battery or mains power supply to operate.

The fingerslide top control models do require a battery (supplied) for ignition. This is located below the burner.

We have a selection of remote control fires that do not require a mains supply but do require a battery (supplied) for ignition. The remote control also requires batteries.

### what ventilation is required?

If you have any questions or queries then you may wish to visit your local ekofires retailer for friendly impartial advice or for a pre-installation survey.

## benefits of conventional flued gas fires

- Choose among a large range of traditional & contemporary inset gas fires to fit into your existing fireplace
- Designed to fit almost any fireplace opening\*
- Authentic flame picture with a choice of realistic coal, pebble and log fuel bed\*
- Selection of stylish frets and frames to suit your interior
- Dual safety features: Oxygen Depletion Sensor and Flame Failure Device
- Available for Natural Gas only
- Radiant or convector options

\*Depending on selected model.



*model shown:*  
eko 3010 with Elegance Brass FRT210 and Classic Inlay FRM10



*eko 3010 w/ mono chrome FRT420*

### *specifications*

Minimum Room Size	27 m <sup>3</sup>
Model Identifier	PI27 Flueless Gas Fire Gas Category = I2H(20)
Control Type/Location	Manual – Rotary (Bottom)
Heat Input (Max/Min) Gross	6.2 kW / 4.1 kW
Heat Output (Max/Min) Gross	3.5 kW / 2.3 kW
Energy Efficiency Class	A
Direct Heat Output	3.5 kW
Outline Dimensions*	W 480 x H 590 x D 192 mm
Installation	Inset Fireplace
Air Vent Required †	100 cm <sup>2</sup>
Safety	Oxygen Depletion Sensor Flame Failure Device Glass fronted
Available in	Choice of frets & frames*

\* Please refer to Technical & Tailoring specification for more info.

† For installation in the Republic of Ireland, two fixed openings are required with a minimum effective opening each of 60 cm<sup>2</sup>. Both ventilators should be fitted on the same wall, one at high level and one low level with a minimum vertical separation of 160 cm.

## *eko 3010*

Ageless and ultra slim in design and appearance – an attractive and alluring fire to fit with any fireplace in any living room.

### *eko 3010*

The entry level eko 3010 is particularly suitable for installations into new homes with shallow starter blocks and some pre-cast flue systems, however, is perfectly at home when used with a conventional chimney. It also has the added benefit of a mains-free ultrasonic remote control (optional extra) that allows you to adjust the flame height from the comfort of your armchair.

### *eko 3015*

The eko 3015 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*



*See pgs 99–100 for more fret & frame options*



*model shown:*  
eko 3020 with Contemporary Stainless Steel fascia CTM10



*eko 3020 w/ mono chrome FRT420*

### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Slimline Inset Convactor Heater Gas Category = 12H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.2 kW / 3.5 kW
Heat Output (Max/Min) Gross	4.1 kW / 2.3 kW
Energy Efficiency Class	F
Direct Heat Output	3.2 kW
Outline Dimensions*	W 480 x H 590 x D 125 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal or pebble fuel bed Removable side cheeks

\*Please refer to Technical & Tailoring specification for more information.

## *eko 3020*

Mirror finish cheeks captivate the flame picture with an energetic and inviting charm making this one of our most popular fires. The eko 3020 is a slimline convector fire with increased performance. A unique feature of this fire is the removable mirror side cheeks which are held in place with two discreet screws. Shown with chrome Mono fret and Classic chrome frame with chrome inlay and mirror side cheeks fitted.

### *eko 3020*

The eko 3020 incorporates a cleverly designed heat exchanger that provides gentle convected warmth and additional heat at no extra running cost. Detachable decorative mirror side cheeks are also included to reflect the stunning flame picture and create the illusion of a full depth effect fuel bed. Of course, if you are looking for a simple black appearance then these can be removed and a elegant choice of modern and traditional frets and frames can be selected.

### *eko 3025*

The eko 3025 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*



*See pgs 99-100 for more fret & frame options*



model shown:  
eko 3030 Blenheim Brass FRT310



eko 3030 w/ elegance chrome & black FRT230

### specifications

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category = 12H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8 kW / 3.5 kW
Heat Output (Max/Min) Gross	3.8 kW / 1.9 kW
Energy Efficiency Class	F
Direct Heat Output	3.8 kW
Outline Dimensions*	W 480 x H 595 x D 180 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed

\*Please refer to Technical & Tailoring specification for more information.

## eko 3030

Classic and ever-popular coal effect gas fire, available with a range of decorative fire frets and accessories to suit your interior decor. The deeper fuel bed of the full depth radiant platform provides exceptional performance and a class leading flame picture. The full depth radiant platform is suitable for use in almost all flues, including most pre-cast block flues.

For added versatility the eko 3030 can be fitted with one of three realistic fuel bed options: Coal, pebble or log (left).

### eko 3030

With the heating potential of 3.8 kW (Gross), the eko 3030 is more than capable of providing a very warm welcome for any home. The realistic fuel bed is available in either pebble, coal or log and there is a wide choice of traditional and contemporary frets and frames to suit your decor.

### eko 3035

The eko 3035 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*



See pgs 99-100 for more fret & frame options



*model shown:*  
eko 3040 with coal fuel bed and eko 7050 white surround



## *eko 3040*

The beautiful Modern polished aluminium fascia and handcrafted pebbles are signs of precision and craftsmanship that amplify the beauty of this distinctive design.

### *eko 3040*

Built on the popular eko 3030 platform, the eko 3040 has been created to provide that extra touch of elegance to your living space. The contemporary lines of the anodised aluminium fascia form a stunning frame to the full depth radiant fuel bed - available in either coal, pebble or log. Customise it further by choosing between a top control (3045) for ease of use, or remote control to allow you to adjust the flame height from the comfort of your chair.

### *eko 3045*

The eko 3045 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

### *specifications*

Minimum Room Size	N/A
Model Identifier	Full Depth Radiant
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.2 kW / 3.5 kW
Heat Output (Max/Min) Gross	3.8 kW / 1.8 kW
Energy Efficiency Class	F
Direct Heat Output	3.8 kW
Outline Dimensions*	W 480 x H 595 x D 180 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed

\*Please refer to Technical & Tailoring specification for more information.

#### *top slide control*



*See pgs 99-100 for more fret & frame options*





*model shown:*  
Left: eko 3060 with coal fuel bed & Blenheim Brass fret



*eko 3065 w/ elegance brass FRT210*

### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Convactor Heater Gas Category = 12H(20)
Chimney/Flue Requirements	Conventional chimney Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	4.0kW / 2.1kW
Energy Efficiency Class	F
Direct Heat Output	4.0kW
Outline Dimensions*	W480 x H590 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed

\*Please refer to Technical & Tailoring specification for more information.

## *eko 3060*

Exceptional in its genre, a time honoured style with full depth fuel bed and bur-nished radiance to enhance your home.

### *eko 3060*

The eko 3060 successfully combines state-of-the-art performance with traditional good looks. The full depth firebox incorporates a cleverly designed heat exchanger that increase the fire's efficiency by providing convected heat in addition to radiant heat.

### *eko 3065*

The eko 3065 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*



*See pgs 99-100 for more fret & frame options*

*timeless  
collection*

*A* quality cast iron fascia and front ash pan are what make the timeless collection so enviable. They are offered for both slimline and full depth inset gas fires which will add a touch of traditional authenticity to any home.

*for steps on choosing an appropriate inset fire please see pages 85 – 86.*





*model shown:*  
eko 3080 Arch Timeless with a coal fuel bed

*surround:*  
eko 7030 Oak Veneer



*eko 3080 arch timeless black cast iron*

### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

## *eko 3080 arch timeless*

### *eko 3080 timeless*

*Traditional, authentic, and timeless.*  
The beautiful frames of the timeless collection are designed to surpass trends and produced to last a lifetime.

Our best selling full depth radiant platform is available in manual control, top control and remote control. Each of the four cast iron fascias are available in polished cast finish or black.

The full depth radiant engine has an enchanting flame picture with powerful radiating glow which emanates from the decorative effect fuel bed. The eko 3080 timeless has a powerful 3.8kW (Gross) heat output on high and this is fully adjustable from 1.9kW (Gross) low. The real advantage of the full depth radiant fire is that it is very versatile. It is suitable for use in almost all flues, including most pre-cast flues making it a very popular model.

### *eko 3085 timeless*

The eko timeless 3085 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*





*model shown:*  
eko 3080 Arch Timeless with a log fuel bed



*eko 3080 edwardian with coal fuel bed*

*specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

*eko 3080  
edwardian  
timeless*

*eko 3080 timeless*

*Traditional, authentic, and timeless.*  
The beautiful frames of the timeless collection are designed to surpass trends and produced to last a lifetime.


Our best selling full depth radiant platform is available in manual control, top control and remote control. Each of the four cast iron fascias are available in polished cast finish or black.

The full depth radiant engine has an enchanting flame picture with powerful radiating glow which emanates from the decorative effect fuel bed. The eko 3080 timeless has a powerful 3.8kW (Gross) heat output on high and this is fully adjustable from 1.9kW (Gross) low. The real advantage of the full depth radiant fire is that it is very versatile. It is suitable for use in almost all flues, including most pre-cast flues making it a very popular model.

*eko 3085 timeless*

The eko timeless 3085 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*also available in black timeless frame*





*model shown:*  
eko 3080 Finsbury Timeless with a coal fuel bed



*eko 3080 arch timeless polished cast iron*

### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

# *eko 3080 finsbury timeless*

## *eko 3080 timeless*

*Traditional, authentic, and timeless.*  
The beautiful frames of the timeless collection are designed to surpass trends and produced to last a lifetime.

Our best selling full depth radiant platform is available in manual control, top control and remote control. Each of the four cast iron fascias are available in polished cast finish or black.

The full depth radiant engine has an enchanting flame picture with powerful radiating glow which emanates from the decorative effect fuel bed. The eko 3080 timeless has a powerful 3.8kW (Gross) heat output on high and this is fully adjustable from 1.9kW (Gross) low. The real advantage of the full depth radiant fire is that it is very versatile. It is suitable for use in almost all flues, including most pre-cast flues making it a very popular model.

## *eko 3085 timeless*

The eko timeless 3085 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*also available in black timeless frame*





*model shown:*  
eko 3080 Soho Timeless with a coal fuel bed

*surround:* eko 7070 Oak Veneer



*eko 3080 soho timeless black cast iron fascia*

### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

# *eko 3080 soho timeless*

## *eko 3080 timeless*

*Traditional, authentic, and timeless.*  
The beautiful frames of the timeless collection are designed to surpass trends and produced to last a lifetime.

Our best selling full depth radiant platform is available in manual control, top control and remote control. Each of the four cast iron fascias are available in polished cast finish or black.

The full depth radiant engine has an enchanting flame picture with powerful radiating glow which emanates from the decorative effect fuel bed. The eko 3080 timeless has a powerful 3.8kW (Gross) heat output on high and this is fully adjustable from 1.9kW (Gross) low. The real advantage of the full depth radiant fire is that it is very versatile. It is suitable for use in almost all flues, including most pre-cast flues making it a very popular model.

## *eko 3085 timeless*

The eko timeless 3085 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*





*model shown:*  
eko 3080 Victorian Timeless with a coal fuel bed



*eko 3080 victorian timeless with log fuel bed*

### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

# *eko 3080 victorian timeless*

## *eko 3080 timeless*

*Traditional, authentic, and timeless.* The beautiful frames of the timeless collection are designed to surpass trends and produced to last a lifetime. Our best selling full depth radiant platform is available in manual control, top control and remote control. Each of the four cast iron fascias are available in polished cast finish or black.

The full depth radiant engine has an enchanting flame picture with powerful radiating glow which emanates from the decorative effect fuel bed. The eko 3080 timeless has a powerful 3.8kW (Gross) heat output on high and this is fully adjustable from 1.9kW (Gross) low. The real advantage of the full depth radiant fire is that it is very versatile. It is suitable for use in almost all flues, including most pre-cast flues making it a very popular model.

## *eko 3085 timeless*

The eko timeless 3085 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*





*model shown:*  
eko 3090 Edwardian Timeless with polished cast iron fascia.



## *eko 3090 edwardian timeless*

*Traditional, authentic, and timeless.*  
The versatile and popular slimline radiant gas fire is completely transformed by the elegant the solid cast iron fascias. The Timeless range features a high quality cast iron created by using traditional casting techniques. Choose between natural polished cast finish or black.

### *eko 3090 timeless*

The eko 3090 timeless is particularly suitable for installations into new homes with shallow starter blocks and some pre-cast flue systems; however, it is perfectly at home when used with a conventional chimney.

### *eko 3095 timeless*

The eko 3095 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

### *eko 3090 edwardian timeless black cast iron*

#### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category = I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

#### *top slide control*







model shown:  
eko 3090 Finsbury Timeless polished cast iron



eko 3090 arch timeless black cast iron

### specifications

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

# eko 3090 finsbury timeless

## eko 3090 timeless

*Traditional, authentic, and timeless.*  
The beautiful frames of the timeless collection are designed to surpass trends and produced to last a lifetime. Our best selling full depth radiant platform is available in manual control, top control and remote control. Each of the four cast iron fascias are available in polished cast finish or black.

The full depth radiant engine has an enchanting flame picture with powerful radiating glow which emanates from the decorative effect fuel bed. The eko 3090 timeless has a powerful 3.8kW (Gross) heat output on high and this is fully adjustable from 1.9kW (Gross) low. The real advantage of the full depth radiant fire is that it is very versatile. It is suitable for use in almost all flues, including most pre-cast flues making it a very popular model.

## eko 3095 timeless

The eko timeless 3095 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

top slide control





*model shown:*  
eko 3090 Soho Timeless black cast iron fascia  
with a coal fuel bed

*surround:*  
eko 7020



*eko 3090 soho timeless w/ eko 7090 surround*

### specifications

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black

\*Please refer to Technical & Tailoring specification for more information.

## eko 3090 soho timeless

*Traditional, authentic, and timeless.*

The versatile and popular slimline radiant gas fire is completely transformed by the elegant the solid cast iron fascias. The Timeless range features a high quality cast iron created by using traditional casting techniques. Choose between natural polished cast finish or black.

### eko 3090 timeless

The eko 3090 timeless is particularly suitable for installations into new homes with shallow starter blocks and some pre-cast flue systems; however, it is perfectly at home when used with a conventional chimney.

### eko 3095 timeless

The eko 3095 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

*top slide control*





*model shown:*  
eko 3090 Victorian Timeless with Victorian black cast iron fascia.



*eko 3090 victorian timeless polished cast iron*

## *eko 3090 victorian timeless*

*Traditional, authentic, and timeless.*  
The versatile and popular slimline radiant gas fire is completely transformed by the elegant the solid cast iron fascias. The Timeless range features a high quality cast iron created by using traditional casting techniques. Choose between natural polished cast finish or black.

### *eko 3090 timeless*

The eko 3090 timeless is particularly suitable for installations into new homes with shallow starter blocks and some pre-cast flue systems; however, it is perfectly at home when used with a conventional chimney.

### *eko 3095 timeless*

The eko 3095 features a simple and discrete high level slide control mechanism to simplify operation. Simply press down on the control to ignite the fire, and then slide upwards to adjust between low and high setting.

#### *specifications*

Minimum Room Size	N/A
Model Identifier	Conventional Full Depth Inset Radiant Heater Gas Category - I2H(20)
Chimney/Flue Requirements	Conventional chimney Pre-cast flue Pre-fabricated flue (min. 5")
Control Type/Location	Manual - Rotary (Bottom) Manual - Slide (Top Right) Remote Control
Heat Input (Max/Min) Gross	6.8kW / 3.5kW
Heat Output (Max/Min) Gross	3.8kW / 1.9kW
Energy Efficiency Class	F
Direct Heat Output	3.5kW
Outline Dimensions*	W480 x H595 x D250 mm
Installation	Inset Fireplace
Air Vent Required	N/A
Safety	Oxygen Depletion Sensor Flame Failure Device
Available in	Coal, pebble or log fuel bed Polished cast iron or cast black


\*Please refer to Technical & Tailoring specification for more information.

#### *top slide control*



# tailoring specification surrounds

## surrounds

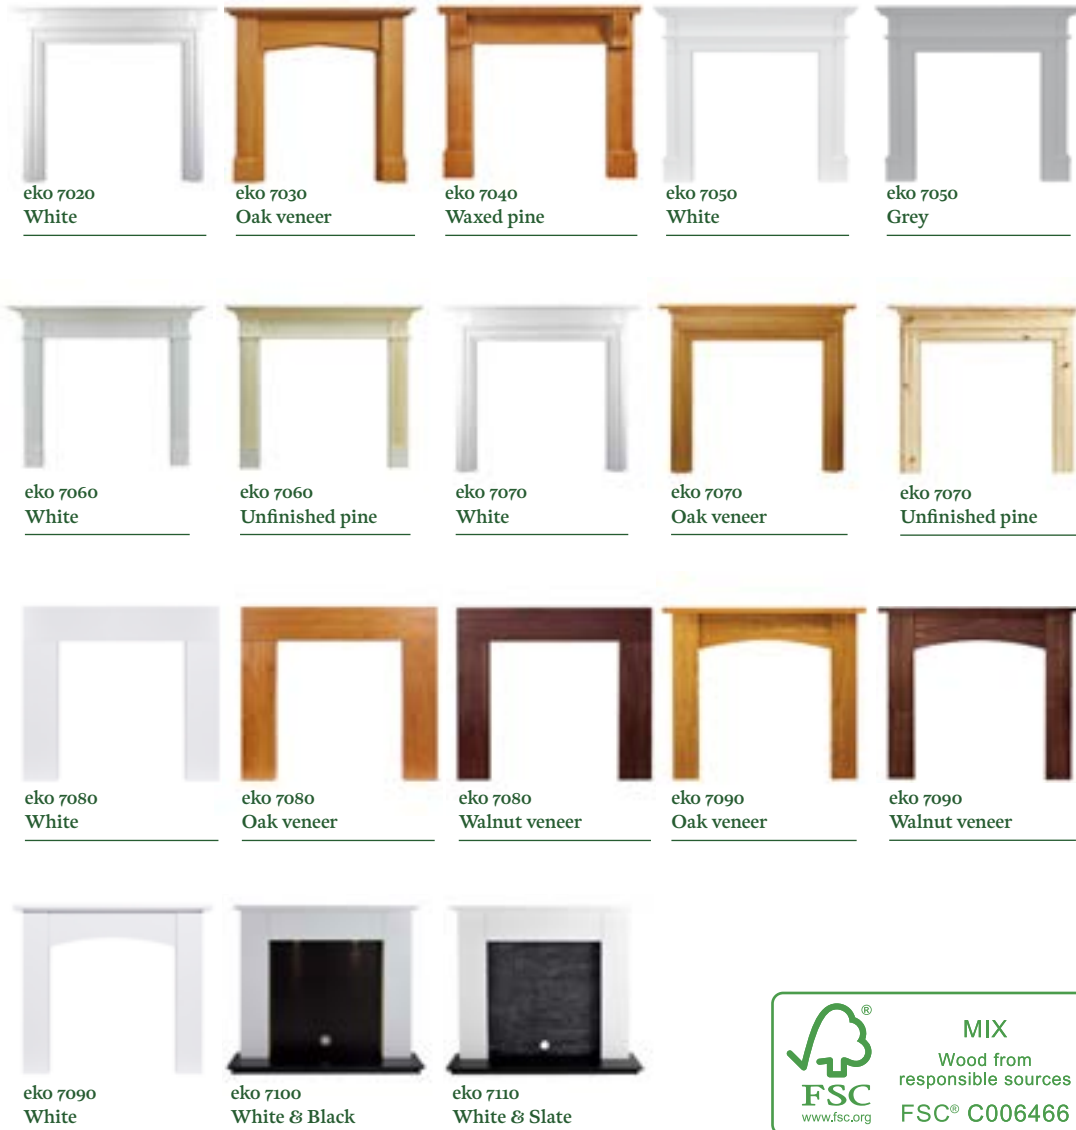


## surround dimensions

	Type	PRODUCT DIMENSIONS						REBATE	
		A	B	C	D	E	F		
<b>WOODEN FIREPLACE SURROUNDS</b>									
eko 7020	Surround	1100	1022	185	740	803	1030	25	75
eko 7030	Surround	1220	1172	210	720	874	1112	25	95
eko 7040	Surround	1340	1140	205	898	888	1286	25	75
eko 7050	Surround	1212	1041	197	762	786	1110	25	75
eko 7060	Surround	1375	1126	180	910	910	1190	25	75
eko 7070	Surround	1340	1172	185	890	910	1174	25	75
eko 7080	Surround	1170	1030	150	770	830	1170	25	75
eko 7090	Surround	1300	1120	185	860	905	1200	25	75
eko 7100	Surround	1250	1091	380	—	—	—	—	—
eko 7110	Surround	1300	1120	185	—	—	—	—	—

## surround schematics

- A Overall width
- B Overall height
- C Overall depth
- D Internal width
- E Internal height
- F Leg width

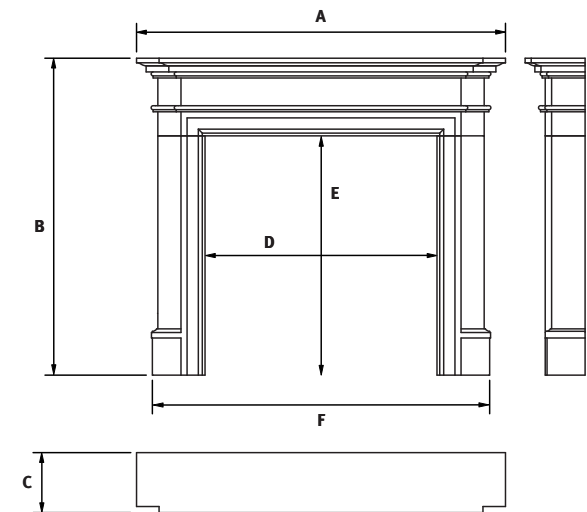

# tailoring specification frets & frames

## frets

### ELYSEE



### ELEGANCE



### BLENHEIM



### MONO



### GROVE



## frames


### CLASSIC PLAIN



### CLASSIC INLAY



### CLASSIC INLAY

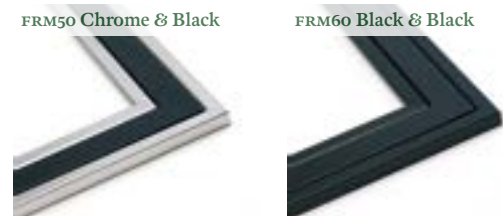

### CONTEMPORARY



Slide Control frames are referenced by a (5) at the end of the part number i.e. FRM10 = Manual Control, FRM15 = Slide Control.  
 \*Frames not available in Slide Control  
 \*\*Timeless fascias are only suitable for the 3100, 3105, 3110 & 3115 Timeless models.

# tailoring specification gas & electric fires

## gas fires

MODEL	TYPE	REMOTE	COAL*	LOG*	PEBBLE*	LPG
<b>FLUELESS GAS FIRES</b>						
eko 5010	Flueless wall hung					✓
eko 5060	Flueless wall hung					✓
eko 5070	Flueless wall hung					✓
eko 5090	Flueless wall hung					
eko 5510	Flueless inset		✓			
eko 6010	Flueless stove			✓		✓
eko 6030	Flueless stove			✓		✓
<b>GLASS FRONTED FLUED GAS FIRES</b>						
eko 4010	Glass fronted		✓			
eko 4015	Glass fronted top control		✓			
<b>CONVENTIONAL FLUED GAS FIRES</b>						
eko 3010	Slimline radiant	✓	✓		✓	
eko 3015	Slimline radiant top control		✓		✓	
eko 3020	Slimline convector	✓	✓		✓	
eko 3025	Slimline convector top control		✓		✓	
eko 3030	Full depth radiant	✓	✓	✓	✓	
eko 3035	Full depth radiant top control	✓	✓	✓	✓	
eko 3040	Full depth radiant	✓	✓	✓	✓	
eko 3045	Full depth radiant top control		✓	✓	✓	
eko 3060	Full depth convector	✓	✓	✓	✓	
eko 3065	Full depth convector top control		✓	✓	✓	
eko 3080 timeless	Full depth radiant	✓	✓	✓	✓	
eko 3085 timeless	Full depth radiant top control		✓	✓	✓	
eko 3090 timeless	Slimline radiant	✓	✓		✓	
eko 3095 timeless	Slimline radiant top control		✓		✓	

## electric fires

MODEL	REMOTE	COAL	LOG	PEBBLE	CRYSTALS
<b>INSET ELECTRIC FIRES</b>					
eko 1060	✓	✓			
eko 1070	✓	✓			
eko 1080	✓	✓			
eko 1090	✓	✓			
<b>WALL MOUNTED ELECTRIC FIRES</b>					
eko 1110	✓		✓		
eko 1120	✓		✓	✓	✓
eko 1190	✓		✓	✓	✓
<b>STOVES ELECTRIC &amp; COMPLETE ELECTRIC SUITES</b>					
eko 1200	✓		✓		
eko 1210	✓		✓		
eko 1220	✓		✓		
eko 1230	✓		✓		
eko 1235	✓		✓		
eko 1240	✓		✓		
eko 1400	✓		✓		
eko 1405	✓		✓		
eko 1500	✓	✓			

■ non-applicable

# tailoring specification all electric fires


## product dimensions

	PRODUCT DIMENSIONS (MM)													OPEN DIMENSIONS (MM)			
	A	B	B1	C	C1	C2	D1	D2	E	F	J	K	L	X MIN	X MAX	Y MIN	Y MAX
<b>INSET ELECTRIC FIRES</b>																	
eko 1060 / 70	480	595		114	57	57	390	480	555					400	450	560	580
eko 1080 / 90	480	595		114	57	57	390	480	555					400	450	560	580
<b>WALL MOUNTED ELECTRIC FIRES</b>																	
eko 1011	520	620		150			380		565								
eko 1110	810	505		160			530		475								
eko 1120	915	440	550	125	249		820		360								
eko 1190	1100	385		140			820		360								
<b>FREESTANDING ELECTRIC STOVES</b>																	
eko 1400	520	620		150			380		565								
eko 1405	810	505		160			530		475								
<b>COMPLETE ELECTRIC SUITES &amp; FREESTANDING ELECTRIC STOVE SUITES</b>																	
eko 1200	1140	886		330						1059	1140	50	330				
eko 1210	1140	872		330													
eko 1220	1080	690		235						1059	1140	50	330				
eko 1230	1000	800		240													
eko 1235	1000	800		240						1059	1140	50	330				
eko 1240	1140	867		330													
eko 1500	1000	943		225													
eko 1510	1120	1000		350													
eko 1520	1120	1000		350													
eko 1530	1120	1000		350													

■ non-applicable


## product schematics

### INSET ELECTRIC FIRES

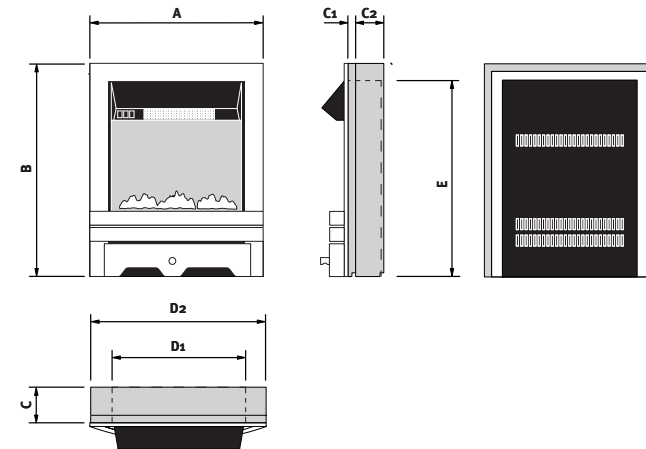

Electric insets include two spacer frames. This allows the electric fire to be installed on a flat wall, semi recessed and fully recessed.

### WALL MOUNTED ELECTRIC FIRES

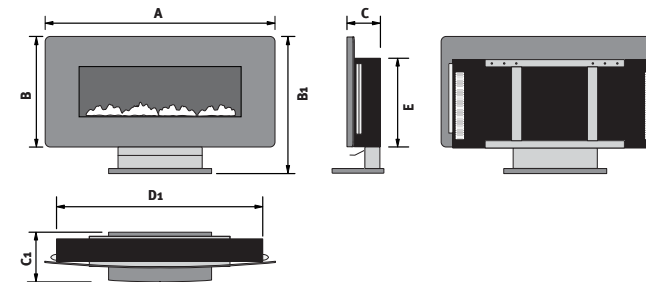

The eko 1120 comes with a removable stand.

### COMPLETE & FREESTANDING ELECTRIC SUITES



All diagrams are for guidance only and are not to scale. All sizes are approximate.

# terms & conditions

## 3-year guarantee – terms & conditions

The three year guarantee is only applicable to purchases made through an authorised ekofires stockist. Please see our ekofires website at: [www.ekofires.co.uk](http://www.ekofires.co.uk) for a list of authorised stockists. Any purchase(s) made through an unauthorised stockist(s) will be eligible for a statutory one year guarantee.

For all gas fires purchased the three year guarantee commences from the date of purchase, provided that the following four terms and conditions are adhered to:

1. For any claim to be made within the three years from date of purchase you will be required to provide and supply us with your proof of purchase.
2. Your gas fire must have been commissioned by a Gas Safe registered engineer, evidence of which you must provide together with the a registration number.
3. Your appliance must have been serviced annually by a Gas Safe registered engineer, evidence of which must be provided, such as the receipt.
4. Purchase(s) must be made through an authorised stockist.

Please note all consumable items such as any ceramics including; coals, pebbles, the matrix, front strips, side cheeks, rear panels and tapered rear panels are not covered by the three year guarantee.

For all electric fires purchased the three year guarantee commences from the date of purchase, providing that you can supply the proof of purchase. This does not cover consumable items such as pebbles, coals or light bulbs. Purchase(s) must be made through an authorised stockist.

## making a claim

Making a claim is easy. If you wish to make a claim under our three year guarantee and all the terms and conditions for your product have been met then please submit the following information for the attention of the 3G Service Department to the address below.

ekofires  
3G Service Department  
10 Avon Trading Park Reid Street  
Christchurch, Dorset, BH23 2BT.

Alternatively, you can email at: [3g@ekofires.co.uk](mailto:3g@ekofires.co.uk)

Details required:

1. Name, address, post code and contact phone #.
  2. Receipt of purchase or credit card statement.
  3. Original installers Gas Safe registration number (*gas fires only*).
  4. Annual service receipt for every 12 months (*gas fires only*).
- Please note that this does not affect your statutory rights.*

## focused

All fires are manufactured under strict guidelines of BS EN ISO9001, an internationally recognised standard for quality management. ISO9001 governs many aspects of the company, from the goods inwards procedures of checking the quality of components coming in to our factories, through production control, to customer service available for appliances manufactured by us. In 2000 we became the first company in our sector to be accredited with BS EN ISO14001.

This standard marks our commitment to the environment and covers everything from recycled materials and biodegradable products, to energy efficiency within the work place.

## patent information

All flueless gas fires are protected under patent GB2275331B. Our range of high efficiency flued gas fires are protected under patent GB2356698B.

## important notice

This brochure was correct at publication; however, as our policy is one of continual development and improvement, specifications may be subject to change. Any such changes will not adversely affect the performance or safety of the appliance. All flueless appliances are intended as a secondary source of heat and should only be used with some form of background heating present. All appliances must be installed in a correctly ventilated space in accordance with the manufacturer's installation instructions and the rules in force. This brochure is for guidance only and is not intended to replace the installation manual, which provides more detailed information. All of our fires carry UKCA and CE Approval which is compulsory for all gas and electric fires sold within the UK and EU. Specifications are valid for Great Britain and Republic of Ireland only. January 2023 (3). ©ekofires.







# Office's RESEARCH REPORTS FROM THE BUREAU OF THE